


## HOW TO REPLACE THE DRAIN PUMP

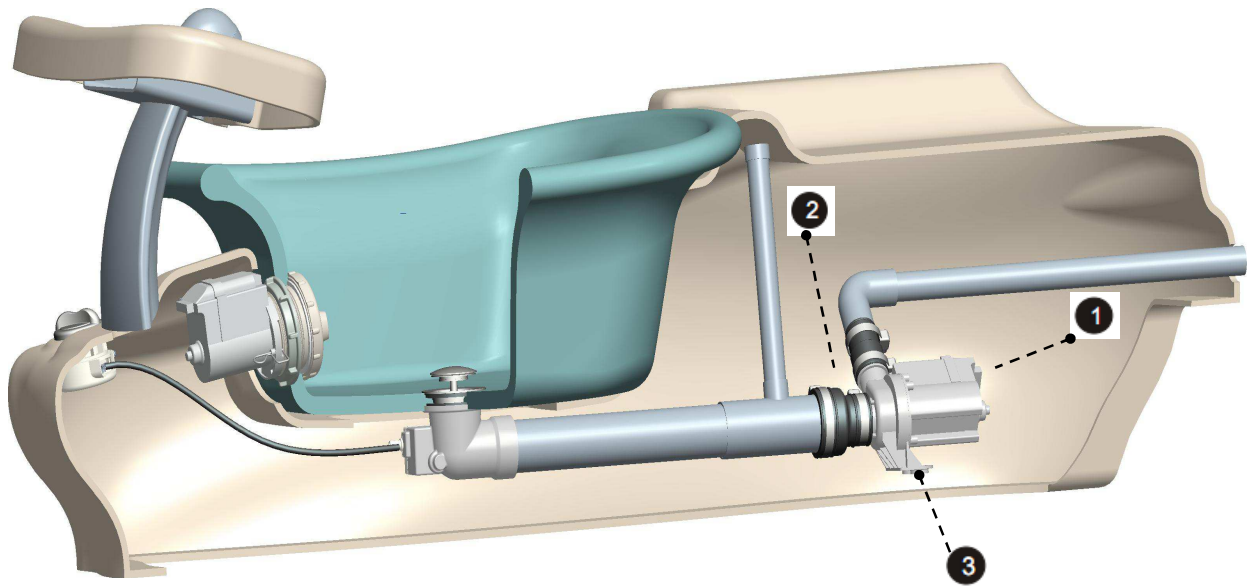

- > **Disconnect AC power from wall outlet.**
- >Loose plumbing connection at rear of spa
- >Tilt the spa on either side, make sure to block spa from turning back
  
- > Remove 2 AC Fast on connectors at (#1)
- > Using Screw driver to unscrew 2 screws at the rubber connectors at (#2)
- > Using wrench to remove 2 mounting screws at (#3)